Silirub. color



Scan here to visit our website to find out more

OXIME



Silirub[®] Color is a high quality neutral cure silicone. It has been specially developed for colour matching using the RAL® Colour system.

- Any RAL® Classic color can be produced
- Virtually odour free
- Low modulus neutral cure
- Primerless adhesion on most surfaces
- UV resistant
- Conforms to ISO 11600 F&G 25 LM
- Fungicide conforms to ISO 846



CE Marking Explained

Product Information

EN 15651-1 TYPE F-INT	Joint sealant for fa@ade elements for interior use
EN 15651-1 TYPE F-EXT-INT	Joint sealant for fa@ade elements for interior and exterior use
EN 15651-1 TYPE F-EXT-INT-CC	Joint sealant for fa@ade elements for interior and exterior use (for use in cold climates)
EN 15651-2 TYPE G	Joint sealant for glazing
EN 15651-2 TYPE G-CC	Joint sealant for glazing applications (for use in cold climates)
EN 15651-3 TYPE S	Joint sealant for Sanitary applications
EN 15651-4 TYPE PW-INT	Joint sealant for pedestrian walkways for interior use
EN 15651-4 TYPE PW-EXT-INT	Joint sealant for pedestrian walkways for interior and exterior use
EN 15651-4 TYPE PW-EXT-INT-CC	Joint sealant for pedestrian walkways for interior and exterior use (for use in cold climates)

Maximum Allowed Distortion

Maximum Allowed Distortion:	25%		20%		12.5%		7.5%
Designation:	Elastic				Plastic		
Material class:	25LM	25HM	20LM	20HM	12.5E	12.5P	7.5P
For sealing fa®ade elements	х	х	х	х	х	х	х
For sealing glazing materials	Х	х	х	х			
For sealing of pedestrian walkways	х	х	х	х			

C€	14 NB0074				
SOUDAL ◀ DoP 230268 ◀					
► EN15651-1: F-EXT-INT-CC-25LM EN15651-2:					

G-CC-25LM


A Guide to ISO 11600 **Classification**

The ISO 11600 Sealant Classes

There are 11 classes of sealant covered by the current ISO 11600 classification scheme.

- Four describe glazing sealants (Type G)
- Seven describe construction sealants (Type F standing for Facade)

The 11 classes are:

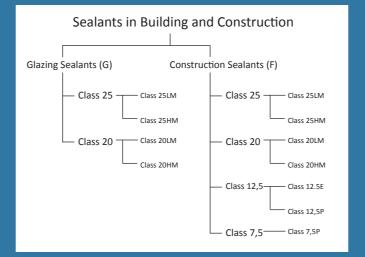

ISO 11600 Designation

In the sealant selection process the specifier matches his requirements to the products available on the market. Sealants classified using the ISO 11600 scheme are described in the producer's technical literature and on packaging labels using a designation which indicates the following:

- END USE Construction (F) or glazing (G)
- MOVEMENT CAPABILITY in the range 7.5% to 25%
- MODULUS high (HM) or low (LM) as defined in ISO 116600
- **ELASTICITY** elastic (E) or plastic (P)

Want to find out more...



visit www.soudal.com to download our full brochure

Distributor Information

Soudal UK Ltd Unit A, Tame Park Vanguard **Tamworth** B77 5DY

2 01827 261 092 m www.soudal.com Silirub.



Experts in sealants, adhesives and PU foams





A tailored service offered from soudal

Silirub_® 2

Premium Quality

Low modulus

• 100% silicone

Independently

F&G 25 LM Including RAL® **CLASSIC** colours

 Sealed unit compatible

neutral cure silicone

Virtually odourless

Primerless adhesion

on most surfaces

• 24 colours available

14 NB0757

SOUDAL

DoP 230001

EN15651-1 F-EXT-INT-CC-25LM

EN15651-2 G-CC-25LM

tested to ISO 11600



SOUDAL

Silirub. LMN








ISO 11600 F&G 25LI

OXIME

- Low modulus neutral cure silicone
- Virtually odourless
- Primerless adhesion on most surfaces
- Conforms to ISO 11600 F&G 25 LM
- 10 colours available







Silirub. LM

High Quality

SOUDAL

Low modulus

neutral cure silicone

Virtually odourless

• Primerless adhesion

on most surfaces

Conforms to ISO

11600 F 12.5 E

• 6 colours available


Silirub. N

General Purpose



- Low modulus neutral cure silicone
- Virtually odourless
- Primerless adhesion on most surfaces
- 7 colours available





Colour Selector

Colour	Silirub 2	Silirub LMN	Silirub LM	1 Silirub	
Brilliant White	\checkmark	\checkmark	\checkmark	✓	
Brilliant White Thickened		✓			
White	\checkmark	\checkmark		\checkmark	
Clear	✓	\checkmark	\checkmark	/	
Grey	✓	/			
Brown	\	/	\checkmark	/	
Black	\		✓	/	
Alu Grey	√				
Anthracite Grey	\checkmark				
Concrete Grey	√				
Dark Grey	√				
Basalt	√				
Portland	√				
Biege	√				
Stone	\				
Oak	\				
Light Brown	\checkmark				
Dark Brown	\checkmark				
Terracotta	√				
Buff	√				
Bronze	√	√			
Teak	√	√	√	/	
Caramel	√	√	✓	/	
Mahogany	√				
Toffee	/				